

PC-60



Cely PC
SERIES



LCD
SEGMENT
DISPLAY



RS-232



CONNECTION TO
2nd PLATFORM



RECHARGEABLE
INTERNAL
BATTERY

Main characteristics

- Industrial piece counting scale connectable to a second platform (single load cell or 4 load cells).
- RS-232 communications for PC or external printer connection.
- 99 PLUs in memory (with alphanumeric characters).
- Internal rechargeable battery:
 - 70 hours' runtime battery, depending on conditions of use.

Features

- Weighing.
- Checkweighing.
- Piece counting:
 - Counting by sampling or by entering the unitary weight.

- Weighing unit conversion (kg / lb).
- Fix tare.
- Tares in memory.
- Auto zero.
- Manual or automatic accumulation.
- Operating temperature: 0°C to + 40°C.

Capacity / Accuracy

- Monorange (30,000 divisions):
 - 3 kg / 0.1 g.
 - 6 kg / 0.2 g.
 - 15 kg / 0.5 g.
 - 30 kg / 1 g.

Available formats

- Flat.

Construction

- Structure:
 - ABS plastic casing.
- Display:
 - 3 backlit LCD segments displays.
 - 6 digits (H20 mm).
 - Show weight, weight/piece and number of pieces.
- Keypad with 20 keys under membrane.
- Stainless steel plate.


Communications

- RS-232.

Power supply

- Mains: AC 12 V / 500 mA adapter.
- Internal rechargeable battery Pb 6 V / 4 Ah.

DIMENSIONS

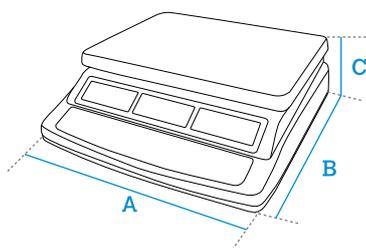

DATA IN mm

A	320
B	330
C	125

Dimensions of the plate: L300 x W230 mm.

Packaging measures: L370 x W445 x H210 mm.
Packaging weight: 5.1 kg.

Accessories

DB9-DB9 cable

RS-232 communications cable.
2-3, 3-2, 5-5 connection.



MODELS:

PC-60 / 3

RANGE 3 kg / 0.1 g

Ref.: 71A0PC600007UE

PC-60 / 6

RANGE 6 kg / 0.2 g

Ref.: 71A0PC600008UE

PC-60 / 15

RANGE 15 kg / 0.5 g

Ref.: 71A0PC600009UE

PC-60 / 30

RANGE 30 kg / 1 g

Ref.: 71A0PC600010UE

Ref: Consult

Note:
- The references correspond to standard models: black ABS plastic casing, backlit LCD segment display and flat stainless steel plate. Capacity: monorange, from 3 kg to 30 kg.