



COUNTER SCALES G-400 SERIES

Flat/pole format price computing scales, without printer and with USB and RS-232 communications for PC, POS or cash drawer connection.



INFORMATION



SEGMENTS
LCD DISPLAY



UP TO
100 PLUs



RS-232




USB



METROLOGICAL
VERIFICATION
OPTIONAL (EU)

Dibal G-400 easy price computing scales without printer can be connected to PC, to send and receive data and updating, or POS/cash drawer. Speed up your business sales with this scale.

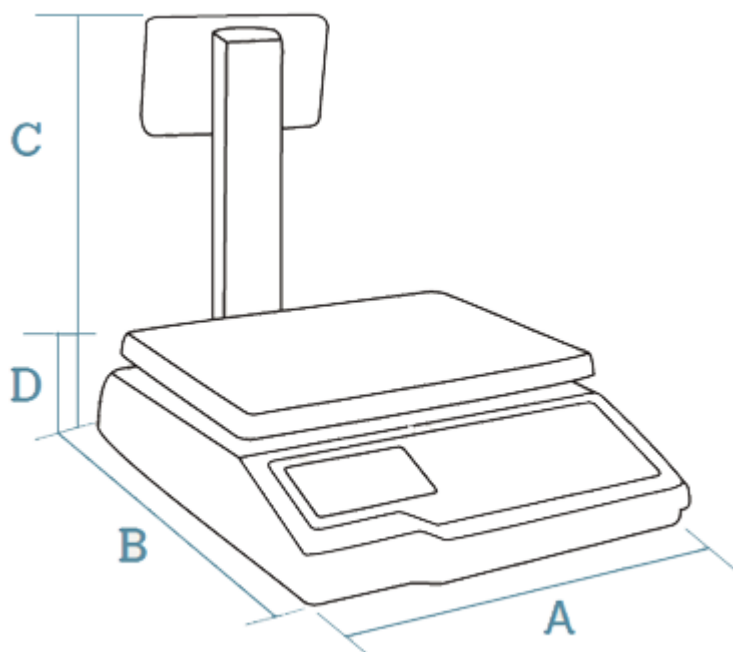

Data in mm

| | |
|---|-----|
| A | 320 |
| B | 400 |
| C | 356 |
| D | 116 |

Plate dimensions: L305 x W235 mm.

MAIN CHARACTERISTICS

- Price computing electronic scale without printer.

- **USB or RS-232 interface:** PC upgradeable firmware and communication protocols.
- **Power via USB:** up to 80 hours of autonomy in energy saving mode with external battery of 5,600 mAh (approximate data).
- **Valid for legal metrology.**

FEATURES

- **EAN heading programming** (according to communication protocol).
- **Tare, fix tare and manual zero.**
- **Fix price:** to operate several times with the same article.
- **Display of price in a secondary currency.**
- **Energy saving via programmable on and off back lighting switching and automatic disconnection.**

CAPACITY / ACCURACY

- **Multirange (3,000 divisions):** 6 kg / 2 g - 15 kg / 5 g.
- **Optional:**
 - Multirange (3,000 divisions): 15 kg / 5 g - 30 kg / 10 g.

AVAILABLE FORMATS

- **Flat and pole in the same scale:**
 - An easy to set up pole is included.

CONSTRUCTION

- **Structure:**
 - ABS plastic casing.
- **Displays:**
 - 5 digits backlit white high-contrast LCD segments display in vendor and buyer side.
 - Shows weight, price/kg and total.
- **Keypad with 32-keys.**
- **Stainless steel flat plate.**

COMMUNICATION TO PC / POS / ECR

- **USB and RS-232 interface.**
- **Communication protocols available for the main POS and ECR in the market.**
- **Communication protocol is selected in the scale.**
- **New protocols can be added from PC by telecharge (maximum: 100 protocols).**

POWER SUPPLY

- **USB: 5 V / 260 mA with AC /DC adapter or through the POS connector.**

MODELS

G-425 F/P

Ref.: 7G401A0LNE_ _

- **Displays:** LCD segments.
- **PLUs:** 100.
- **Direct PLUs:** 9x2.
- **Communication protocols:** Up to 100.
- **Power through a USB:** Mains/Others.
- **Capacity / Accuracy:** 6 kg / 2 g - 15 kg / 5 g.

OPTIONS

| OPTION | CHARACTERISTICS | REF. |
|-------------------------------------|--|-------------|
| Capacity 15 kg / 5 g - 30 kg / 10 g | Multirange (3,000 divisions). | ...F_ _ (*) |
| Metrological verification (M) | According to EU weighing directives. (See section on equipment metrological verification). | Contact us |
| (*) | The scale references with this capacity are obtained by replacing the last characters of the reference for the standard scale with the indicated ending. | |

ACCESSORIES



ITALIAN PLATE

L357 x W235 x H55 mm.

The Italian plate is placed on the flat plate. A new weight adjustment might be necessary. Consult.



Astintze, 26
48160 Derio (Vizcaya) Spain
T. (+34) 94 452 15 10
E. dibal@dibal.com