

PRECISION
SCALES


DIBAL

PB-50 series



Dimensions DATA IN mm

A	290
B	312
C	71
D	383

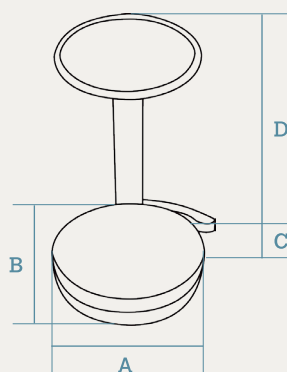

Dimensions of the plate: \varnothing 232 mm.

Packaging measures: L355 x W385 x H510 mm.
Packaging weight: 3.8 kg.



Cely PB
SERIES



LCD
SEGMENT
DISPLAY



RS-232



RECHARGEABLE
INTERNAL
BATTERY

Characteristics and functionality

Main characteristics

- Precision scale with RS-232 communications for PC or external printer connection.
- Internal rechargeable battery:
 - › Up to 40 hours' runtime, depending on conditions of use.

Features

- Weighing.
- Checkweighing.
- Fix tare.
- Auto zero.
- Manual or automatic accumulation.
- Weighing unit conversion (kg / oz / lb / g).
- Operating temperature: 0° C to +40° C.

Capacity / Accuracy

- Monorange [60,000 divisions]:
 - › 3 kg / 0.05 g.
 - › 6 kg / 0.1 g.
 - › 15 kg / 0.2 g.

Available formats

- Pole.

Construction

- Structure:
 - › ABS plastic casing.
 - › Handle at the base to ensure stability and facilitate transport.
- Display:
 - › Backlit LCD segment display.
 - › 6 digits (H22 mm).
 - › Adjustable tilt head for easy reading.
- Keypad with 6 keys under membrane.
- Stainless steel plate.

Communications

- RS-232.

Power supply

- Mains: AC 12 V / 500 mA adapter.
- Internal rechargeable battery NI-MH (1.2 V / 2 Ah x 6).

Models

CELY PB-50 / 3

RANGE 3 kg / 0.05 g

Ref.: 71A0PB500014UE

CELY PB-50 / 6

RANGE 6 kg / 0.1 g

Ref.: 71A0PB500016UE

CELY PB-50 / 15

RANGE 15 kg / 0.2 g

Ref.: 71A0PB500017UE

Accessories

DB9-DB9 cable

RS-232 communications cable.
2-3, 3-2, 5-5 connection.



Ref: Consult

Note:

- The references correspond to standard models: white ABS plastic casing, backlit LCD segment display and flat stainless steel plate.
Capacity: monorange, from 3 kg to 15 kg.